



Grade Rings




Height Lids

H2O Manhole Lids		
Diameter mm	Weight kg/ea	Height mm
750	170	254
900	318	267
1050	499	280
1200	805	280
1350	1111	330
1500	1597	350
1800	2431	350
2400	3850	360

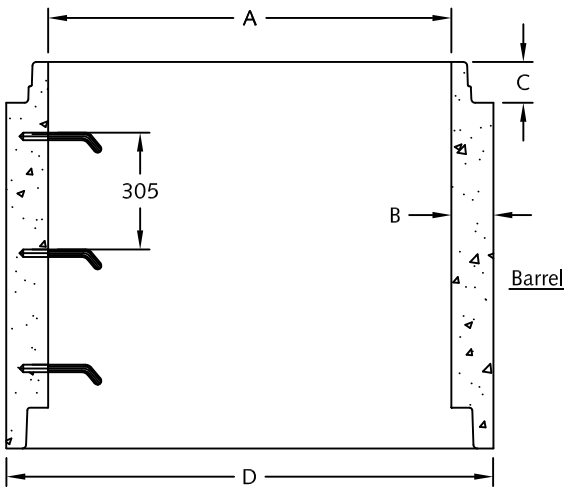

Barrel

Manhole Barrel Data					
Diameter mm	Weight kg/m	A mm	B mm	C mm	D mm
750	600	762	88.90	83	940
900	820	914	101.60	89	1118
1050	1086	1067	114.30	108	1295
1200	1340	1219	127.00	108	1473
1350	1670	1372	139.70	108	1651
1500	2005	1524	152.40	121	1829
1800	2790	1829	177.80	127	2184
2400	4615	2438	228.60	130	2896

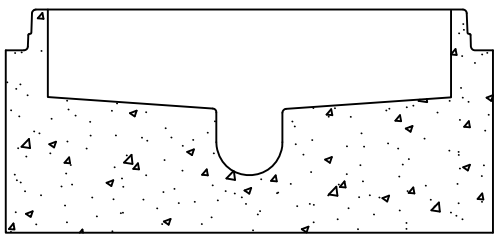

Pre-benched Bases

Notes:

1. Manhole barrel and lids are manufactured to ASTM C 478M specifications.
2. Manhole barrel are available in 0.30, 0.61, 0.91 and 1.22 meters heights.
3. Pre-benched manhole bases are available for most types of pipe from 150 mm diameter through 750 mm diameter.
4. Manhole grade rings are available in 50 mm, 100 mm and 150 mm thicknesses.
5. 1050 through 1800 mm diameter sizes are designed to accept Tylox super seal pre-lubricated gaskets.



DESCRIPTION:

Manhole Details
Vancouver Island

www.langleyconcretegroup.com

DRAWN BY: JAO

SCALE: 1:20

DATE: September 2005

ORIGIN:
LOMBARD

DRAWING NO:

MHV-1

This drawing is the property of the Langley Concrete Group of Companies. All information contained herein is confidential and may not be used in whole or in part without written permission from the owner.

LANGLEY (604)533-1656

VICTORIA (250) 478-9581

CHILLIWACK 1-800-667-9600