


Plan View

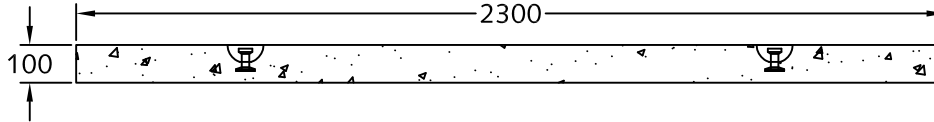

Section View

Notes:

1. 2.3 x 1.2 x 0.1 m Pipe protector pad as shown.
2. Slabs reinforced using 15M rebar.
3. Unit c/w 3-5T lifting inserts as shown.
4. Approximate mass:
  - 675 kg.
5. Minimum rebar yield strength: 414 MPa.
6. Minimum concrete strength: 27.6 MPa.
7. All reinforcement to have min. 25 mm concrete cover.
8. All dimensions are in millimeters.



DESCRIPTION:

2300 x 1200 mm  
Pipe Protector Pad

[www.langleyconcretegroup.com](http://www.langleyconcretegroup.com)

DRAWN BY:	KS	ORIGIN:	CHWK
CHK BY:	JAO/SW	DWG NO:	PPP-TG1
DATE:	OCT/19/2009	REV DATE:	N/A
SCALE:	1:20		

This drawing is the property of the Langley Concrete Group of Companies. All information contained herein is confidential and may not be used in whole or in part without written permission from the owner.