
| PART LIST | | | | |
|-----------|-----|------------------------|---------|--|
| ITEM | QTY | PART NUMBER | WEIGHT | |
| 1 | 1 | 1200mm Pole Base | 725 kg. | |
| 2 | 2 | 5 x 110 Lifting Insert | | |
| 13 | 3 | 35mm PVC Conduit 900mm | | |
| 14 | 4 | 19mm Washer | | |


| OPTION'S | | | |
|-------------------|------------------------|--|--|
| BOLT SPACING (mm) | GALVANIZED ANCHOR BOLT | | |
| 150 | 19 x 610mm | | |
| 160 | 19 x 610 mm | | |
| 180 | 25 x 920 mm | | |
| 197 | 25 x 920 mm | | |


Notes:

- 1. 1200mm Precast Parking Lot Pole Base to be built as shown.
- 2. Unit supplied with required anchor bolts, spacing PVC conduits as required.
- 3. Unit c/w lifting inserts as required.
- 4. Unit Supplied with Nuts and Washers as required.
- 5. Minimum concrete strength: 30 MPa.
- 6. Welded wire mesh min. yield strength: 448 MPa.
- 7. Minimum rebar yield strength: 414 MPa (Steel Grade: G30.18 400 weldable)
- 8. All dimensions are in millimeters.
- 9. Installation & backfilling is the responsibility of others.
- 10.V- Groove Drain Trough to Start at Zero Depth in Centre of Base to 10mm at the Outside edge. Align with Conduit.

Note: 25mm Spacing between Conduits

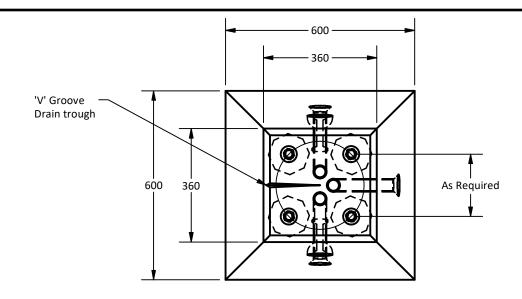

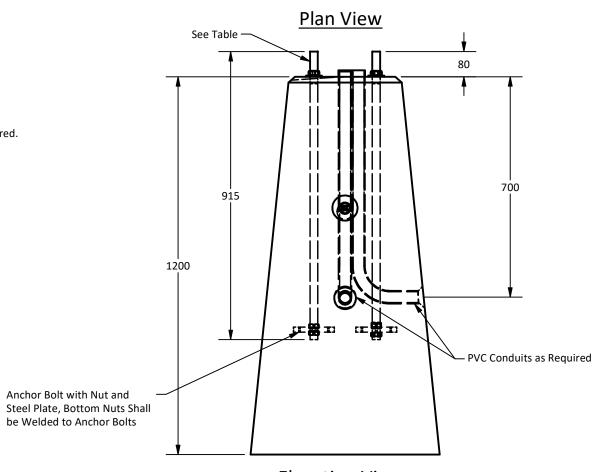

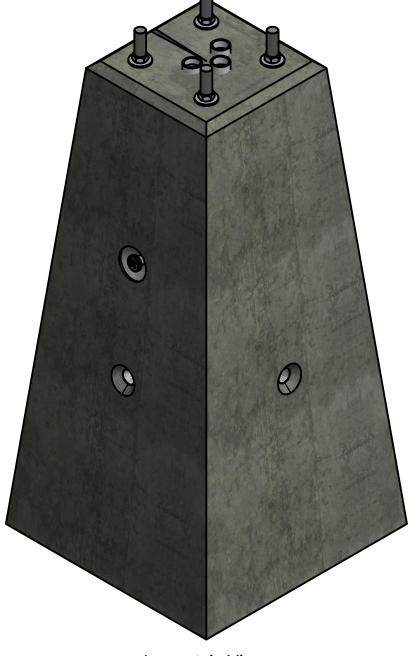

Isometric View

Elevation View

Langley Concrete Group is a certified Q-Cast Plant, an American Concrete Pipe Association Third Party Certification for the manufacture of Pipe, Manhole, Box Culvert & Precast Items.



Quality Assurance of products manufactured by The Langley Concrete Group has been verified by the following third party certification programs



All Dimensions are in Millimeters. Unless otherwise Stated

Projection Method: THIRD ANGLE



The **LANGLEY CONCRETE** Group of Companies

www.langleyconcretegroup.com LANGLEY (604) 533-1656 VICTORIA (250) 478-9581 CHILLIWACK 1-800 667-9600 This drawing is the property of the Langley Concrete Group of Companies.
All information contained herein is confidential and may not be used in whole or in part without written permission from the owner

DESCRIPTION:

Precast Concrete Pole Base 1200 mm Parking Lot Pole NON-MMCD

| DRAWN BY: JOB NO. | | | | |
|----------------------|---------|------------------------------|--|--|
| DRAWN BY: BY | | JOB NO. | | |
| снк ву: KS | | DWG NO: LPB-1200-NON-MMCD | | |
| DATE: Jan.(| 3, 2020 | LC NO: | | |
| SCALE: 1:12 | | MU NO: | | |
| SIZE 11 x 17 | REV. | SHEET 1 OF 1 | | |